




## Bali DELIMAR


Item number 43273, KMAT 61000412

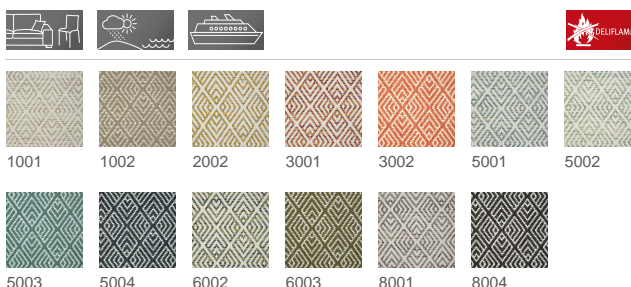


### Product description

DELIMAR fabrics have been specially developed for outdoor use. These upholstery fabrics are made from the innovative Polyolefinic FR fiber, which permanently combines many positive properties. Flame retardancy, high light fastness, chlorine and seawater resistance and weather resistance are the hallmarks of this special fiber. The designs are machine-washable at 40°C and quick-drying, so that mold and bacteria cannot form in the first place. DELIMAR fabrics are free of harmful substances, antistatic and water-repellent. The timeless diamond pattern of Bali in a subtle ethnic look is virtually non-directional and versatile. It is reminiscent of traditional craftsmanship and makes you dream of faraway lands. The multicolored effect in combination with fresh white underlines the beautiful structure of the 13 colors.

### Technical Details



<b>Fabric width</b>	approx. 140 cm
<b>Weight je m<sup>2</sup></b>	approx. 610 g/m <sup>2</sup>
<b>Rapport Width</b>	11.5
<b>Composition</b>	length approx. 15 cm, width approx. 11.5 cm 100% Polyolefinic FR
<b>Flame retardancy</b>	IMO 2010 FTP Code Part 8, 1 / M, BS 5852 CRIB 5, DIN EN 1021-2, DIN EN 1021-1, CAL TB 117, NFPA 260 Flammability performance is dependant on the foam used.

<b>Light fastness</b>	note 6
<b>Wash fastness 40°C</b> <b>DIN EN ISO 105-C06</b>	note 4-5
<b>Wash fastness 60°C</b> <b>DIN EN ISO 6330 DIN EN ISO 5077</b>	note 4-5
<b>Dimensional change Washing 40°C</b> <b>DIN EN ISO 6330 DIN EN ISO 5077</b>	warp approx. +/-2%, weft approx. +/-1%
<b>Dimensional change Washing 60°C</b> <b>DIN EN ISO 6330 DIN EN ISO 5077</b>	warp approx. +/-3%, weft approx. +/-3%
<b>Seawater safety</b>	4-5
<b>DIN EN ISO 105-B02</b>	
<b>Chlorine water safety</b>	4-5
<b>Rubbing fastness</b> <b>DIN EN ISO 105-X12</b>	dry: note 4-5, wet: note 4-5
<b>Abrasion to Martindale</b> <b>DIN EN ISO 12947-2</b> <b>DIN EN 14465-2006</b>	approx. 40000 rubs
<b>Pilling</b> <b>DIN EN ISO 12945-2</b>	Note 5 at 2000 rpm
<b>Care labelling</b>	
<b>State</b>	2024-04-26