




Contralux 300

Item number 34068, KMAT 61000325

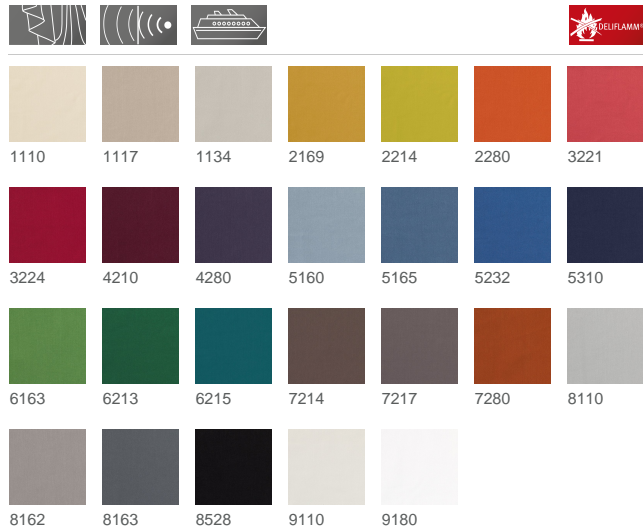


Product description

Contralux is a long-standing companion at Delius that never goes out of fashion. This is ensured by the classic, natural fabric appearance, which is a rarity in polyester fabrics. Contralux is a matt satin with a cotton character. Thanks to its dense, closed weave, it has a strong darkening function and excellent acoustic properties. Contralux is particularly popular in the education and administration sectors, where clear colors and functionality are paramount. Contralux is also available in 150 cm widths.

Technical Details

Fabric width	approx. 300 cm
Weight je m²	approx. 350 g/m ²
Composition	100% Polyester FR
Flame retardancy	IMO 2010 FTP Code Part 7, M 1, C 1, BS 5867 Typ B, EN 13773, DIN 4102 / B1, DIN 4102 / B2, NFPA 701 Flammability performance is dependant on the foam used.
Light fastness	note 5-6
Light & solar properties	
Wash fastness 40°C DIN EN ISO 105-C06	note 4-5
Wash fastness 60°C DIN EN ISO 6330 DIN EN ISO 5077	note 4-5

Wash fastness 72°C DIN EN ISO 6330 DIN EN ISO 5077	note 3
Dimensional change Washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1%
Dimensional change Washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1%
Dimensional change Washing 72°C DIN EN ISO 6330 DIN EN ISO 5077	
Rubbing fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.8
Sound absorption	Class B
Care labelling	
State	2024-04-23