


## Lea

Item number 24563, KMAT 61000070

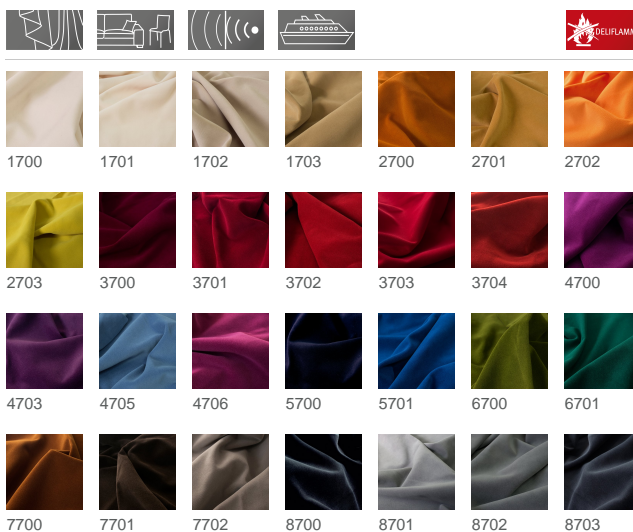


### Product description

Lea is a classic velour that is characterized by its matt shimmer and dense pile. The color palette consists of 28 typical velour colors. At 520 g/m<sup>2</sup>, it is a heavyweight in the velour family. Lea is suitable for use both as an upholstery fabric and as a curtain. 100,000 abrasion cycles prove its durability and with sound absorption class A, Lea has top marks in the field of acoustics. The velours Mila with 380 g/m<sup>2</sup> and Elba 250 g/m<sup>2</sup> are available in the same color palette. The areas of application for Lea range from curtains in the hotel suite to upholstery fabric for sophisticated restaurant seating to furnishings for cinemas and theaters.

### Technical Details



<b>Fabric width</b>	approx. 140 cm
<b>Weight je m<sup>2</sup></b>	approx. 520 g/m <sup>2</sup>
<b>Composition</b>	100% Polyester Trevira CS
<b>Flame retardancy</b>	IMO 2010 FTP Code Part 8, IMO 2010 FTP Code Part 7, M 1, C 1, BS 5852 CRIB 5, EN 13773, DIN EN 1021-2, DIN EN 1021-1, DIN 4102 / B1, DIN 4102 / B2, NFPA 701, MVSS 302, CAL TB 117, NFPA 260, BS 5867 Typ C Flammability performance is dependant on the foam used.
<b>Light fastness</b>	note 5-6

Wash fastness 40°C DIN EN ISO 105-C06	note 4-5
Wash fastness 60°C DIN EN ISO 6330 DIN EN ISO 5077	note 4-5
Dimensional change Washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1%
Dimensional change Washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1%
Rubbing fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	approx. 100000 rubs
Pilling DIN EN ISO 12945-2	Note 5 at 2000 rpm
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.9
Sound absorption	Class A
Care labelling	
State	2024-04-27