


Connor

Article Number 41154

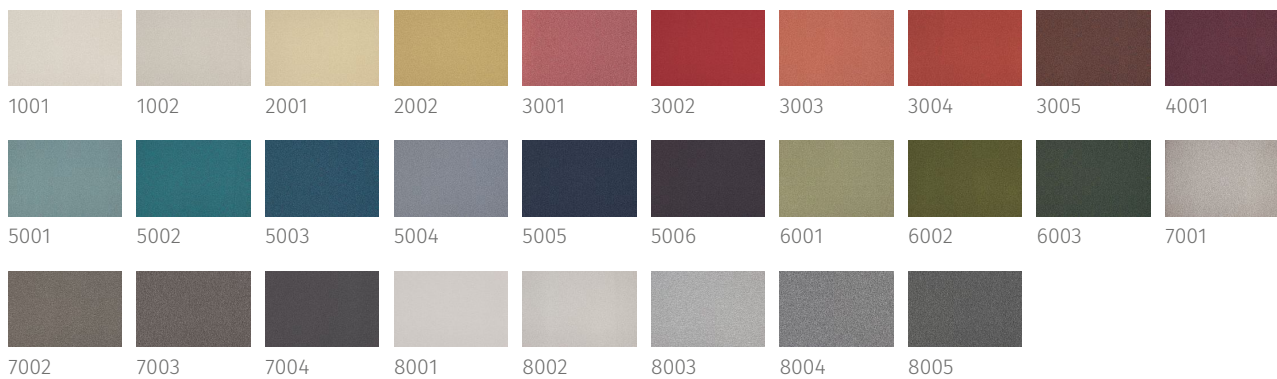

Width	140 cm
Weight	350 g/m ²
Repeat	Kein Rapport
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), 1-M, NFPA260, Ca_TB_117, EN 13773, C1, Schwerentflammbarkeit hängt von verwendetem Schaum ab.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Wash fastness 60°C DIN EN ISO 105 C10	note 5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	Kette ca. +/-1%, Schuss ca. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	Kette ca. +/-2%, Schuss ca. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	Kette ca. +/-1%, Schuss ca. +/-1 %
Rub fastness DIN EN ISO 105-X12	trocken Note 5, nass Note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	70000

Pilling DIN EN ISO 12945-2

Note 4-5 bei 2000 Touren

Measured sound absorption coefficient
DIN EN ISO 354/DIN EN ISO 11654

0.8

Sound absorption class

B

Care



Care Health & Care



The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.